


UC300 HS24 Cat.5e

SF/UTP Installation Cable

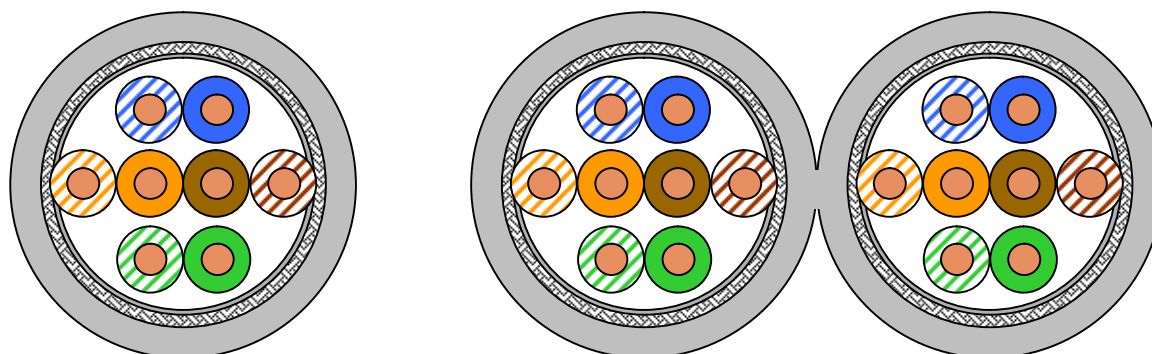

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;
IEEE 802.5 16 MB; ISDN; TPDDI; ATM
Power over Ethernet (PoE) / PoE+

Standards

EN 50173-1; EN 50288-2-1
ISO/IEC 11801; IEC 61156-5
TIA/EIA-568-B.2
IEEE 802.3at

Flame resistance

PVC: IEC 60332-1
LSHF(LSOH): IEC 60332-1; IEC 60754-2; IEC 61034
LSHF-FR(LSFROH): additionally IEC 60332-3-24

Construction

Conductor	bare copper wire, Ø 0.51 mm (AWG24)
Insulation	PE, Ø 1.1 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core
Screen	Al-laminated plastic foil and Copper braid, tinned
Sheath	PVC alt. LSHF, grey RAL 7035 Duplex sheath: two cables parallel, separable

Mechanical properties

Bending radius	without load	≥ 25 mm
	with load	≥ 50 mm
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

UC300 HS24 Cat.5e

Electrical properties

at 20°C ± 5°C

Loop resistance		≤ 190 Ω/km
Resistance unbalance		≤ 2%
Insulation resistance	(500 V)	≥ 2000 MΩxkm
Mutual capacitance	at 800 Hz	Nom. 48 nF/km
Capacitance unbalance	(pair/ground)	≤ 1500 pF/km
Mean characteristic impedance	100 MHz	100 ± 5 Ω
Nominal velocity of propagation		ca. 67%
Propagation delay		≤ 535 ns/100 m
Delay skew		≤ 20 ns/100 m
Test voltage	(DC, 1 min) core/core and core/screen	1000 V
Transfer impedance	at 1 MHz	≤ 20 mΩ /m
	at 10 MHz	≤ 20 mΩ /m
	at 30 MHz	≤ 30 mΩ /m
	at 100MHz	≤ 60 mΩ /m
Coupling attenuation		≥ 75 dB
Segregation class		"c"

Electrical data (nominal)

acc. to Cat.5e (at 20°C)

F (MHZ)	Attenuation (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Return loss (dB)
1.0	1.9	71	68	69.1	66.1	68	65	20
4.0	3.7	62	59	58.3	55.3	56	53	23
10.0	6.0	56	53	50.0	47.0	48	45	25
16.0	7.6	53	50	45.4	42.4	44	41	25
20.0	8.5	51	48	42.5	39.5	42	39	25
31.2	10.7	49	46	38.3	35.3	38	35	24
62.5	15.7	44	41	28.3	25.3	32	29	22
100.0	19.8	41	38	21.2	18.2	28	25	20
125.0	22.3	40	37	17.7	14.7	26	23	19
155.5	24.2	38	35	13.8	10.8	24	21	
175.0	25.7	37	34	11.3	8.3	23	20	
200.0	27.5	36	33	8.5	5.5	22	19	
250.0	29.2	35	32	5.8	2.8	20	17	
300.0	32.0	34	31	2.0	-1.0	16	13	

UC300 HS24 Cat.5e

Product order data

Product code	Cable type	Brand name	Outer diameter	Fire load		Weight	Copper content	Tensile force
			mm	MJ/km	kWh/m	kg/km		N
1000227	J-2Y(St)CY 4x2x0.51	UC300 HS24 Cat.5e SF/UTP 4P	6.4	474	0.132	46	27	120
1000536	J-2Y(St)CH 4x2x0.51	UC300 HS24 Cat.5e SF/UTP 4P LSHF		433	0.120	47		
1000546	J-2Y(St)CH 4x2x0.51	UC300 HS24 Cat.5e SF/UTP 4P LSHF-FR						
1000245	J-2Y(St)CY 2x(4x2x0.51)	UC300 HS24 Cat.5e SF/UTP 2x4P	6.5/13.0	948	0.264	92	54	240
1000493	J-2Y(St)CH 2x(4x2x0.51)	UC300 HS24 Cat.5e SF/UTP 2x4P LSHF		866	0.240	94		
1000499	J-2Y(St)CH 2x(4x2x0.51)	UC300 HS24 Cat.5e SF/UTP 2x4P LSHF-FR						

Produkt Code Tabelle

Product name	Produkt Code	PG Referenz Code	PG Artikel Nummer
UC300 HS24 C5e SF/UTP 4P PVC 500DP	1000227-00500DP	60013164	60013164
UC300 HS24 C5e SF/UTP 2x4P PVC 500DP	1000245-00500DP	60017479	60017479
UC300 HS24 C5e SF/UTP 4P LSHF	1000536	60009618	60009618
UC300 HS24 C5e SF/UTP 4P LSHF 50RW	1000536-00050RW	60009618	60024745
UC300 HS24 C5e SF/UTP 4P LSHF 100RW	1000536-00100RW	60009618	60013237
UC300 HS24 C5e SF/UTP 4P LSHF 250RW	1000536-00250RW	60009618	60024746
UC300 HS24 C5e SF/UTP 4P LSHF 500DW	1000536-00500DW	60009618	60011496
UC300 HS24 C5e SF/UTP 4P LSHF 1000DW	1000536-01000DW	60009618	60009201
UC300 HS24 C5e SF/UTP 4P LSHF 6000DW	1000536-06000DW	60009618	60017493
UC300 HS24 C5e SF/UTP 4P LSHF-FR 500DP	1000546-00500DP	60024665	60024665
UC300 HS24 C5e SF/UTP 2x4P LSHF 100DW	1000493-00100DW	60017490	60017490
UC300 HS24 C5e SF/UTP 2x4P LSHF 500DW	1000493-00500DW	60017490	60017491
UC300 HS24 C5e SF/UTP 2x4P LSHF 1000DW	1000493-01000DW	60017490	60017492

© PRYSMIAN GROUP 2008, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.